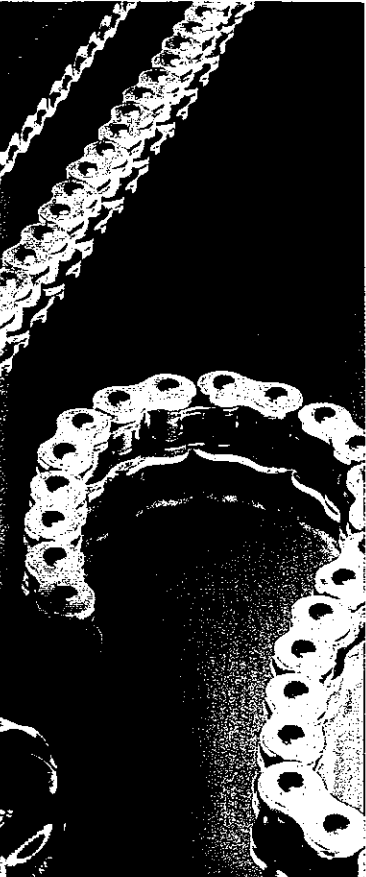


OFF ROAD CHAIN

CHAIN & SPROCKETS



DID

Racing Chain

Powered by Technology



08704 282272
sales@bickersplc.com

BICKERS

ER SUPER PROFESSIONAL GOLD EXCLUSIVE RACE CHAIN

D.I.D ER chain is designed exclusively for motorcycle racing. This high performance, lightweight and low friction chain provides the winning edge in world class competition. It is made in non O-Ring and X-Ring models for Motocross.

Chain No.	Pitch		Width		Roller dia		Anti Wear Resistance	Av.Tensile Strength (Kg/F)	Fatigue Strength(Kg/F)
	mm	in	mm	in	mm	in			
520ERT2	15.88	5/8	6.35	1/4	10.16	0.400	420	3800	860
520MX	15.88	5/8	6.35	1/4	10.16	0.400	440	4100	1100

PREMIUM X-RING CHAIN GOLD

D.I.D's Professional sealed chains incorporated D.I.D's uniquely designed seal-rings which seal D.I.D's special "V" grease in the pin/bushing area and lock dirt out. They are expected to last at least ten times longer than ordinary construction standard chains without significant wear elongation under satisfactory maintenance.

Chain No.	Pitch		Width		Roller Dia mm	Plate Thickness		Weight/ 100 Links		Tensile Strength		Seal Type	Wear Resistance Index Std Chain = 100
	mm	in	mm	in		Inner	Outer	Kgs	Lbs	KN	Lbs		
520VM	15.875	5/8	6.35	0.254	10.22	2.0	2.0	1.54	3.40	35.80	8,050	X	3,220
520ZVM2	15.875	5/8	6.35	0.254	10.22	2.0	2.0	1.05		38.00	9,300	X	3,400

PROFESSIONAL O-RING V SERIES (428V,520V)

Standard 'O'- Ring chains with solid bush fitment that will produce a high cost/performance factor.

Chain No.	Pitch		Width		Roller Dia mm	Plate Thickness		Weight/ 100 Links		Tensile Strength		Seal Type	Wear Resistance Index Std Chain = 100
	mm	in	mm	in		Inner	Outer	Kgs	Lbs	KN	Lbs		
428V	12.70	1/2	7.94	0.313	8.50	1.8	1.8	1.08	2.38	23.80	5,340	O	1,890
520VX	15.875	5/8	6.35	0.250	10.16	2.0	2.0	1.52	3.36	30.40	6,830	O	2,350

SUPER HEAVY DUTY (420NZ, 520NZ)

Chain No.	Pitch		Width		Roller dia		Anti Wear Resistance	Av.Tensile Strength (Kg/F)	Fatigue Strength(Kg/F)
	mm	in	mm	in	mm	in			
420NZ2	12.70	1/2	6.35	1/4	7.77	0.306	210	2160	500
520NZ	15.88	5/8	6.35	1/4	10.16	0.400	200	3200	1000

HEAVY DUTY (415S, 428H, 520HS)

Chain No.	Pitch		Width		Roller dia		Anti Wear Resistance	Av.Tensile Strength (Kg/F)	Fatigue Strength(Kg/F)
	mm	in	mm	in	mm	in			
415S	12.70	1/2	4.76	3/16	7.77	0.306	130	1950	380
428H	12.70	1/2	7.94	5/16	8.50	0.335	130	2460	500
520HS	15.88	5/8	6.35	1/4	10.16	0.400	130	3700	800

STANDARD (420, 428, 520)

Chain No.	Pitch		Width		Roller dia		Anti Wear Resistance	Av.Tensile Strength (Kg/F)	Fatigue Strength(Kg/F)
	mm	in	mm	in	mm	in			
420	12.70	1/2	6.35	1/4	7.77	0.306	100	1900	380
428	12.70	1/2	7.94	5/16	8.50	0.335	100	2000	400
520	15.88	5/8	6.35	1/4	10.16	0.400	100	3200	700

IMPORTANT NOTICE TO DEALERS

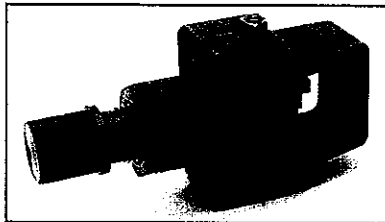
RECOMMENDED FITMENTS:

Only grade of chain listed in this catalogue should be used.

PLEASE NOTE: If you are offered grades of D.I.D chain which do not appear in this catalogue, they may be unsuitable for current UK models. Only grades listed herein are officially imported into the UK and are covered by warranty and product liability insurance.

Should you be unsure of the source and/or suitability of chain supplied, please contact the chain technical department at Bickers, official D.I.D. importer.

D.I.D roller chain is warranted to the original purchaser to be free of mechanical defects in material and workmanship only. The manufacturer's obligation hereunder is limited to replacing such product during the warranty period, provided that the product is sent pre-paid to the authorised UK importer for inspection.

ZJ LINK RIVETTING/CUTTING TOOL - HEAVY DUTY GRADE FOR PROFESSIONAL WORKSHOP**D.I.D MODEL KM500**

- Steel construction for maximum strength
- Small compact design
- Simple to use with easy to follow instructions

This unique item is designed to cut chain, press fit connecting link plates and rivet pin heads all with one simple-to-use tool. This tool is for use with D.I.D's new ZJ rivet connecting link only. Do not use this to rivet D.I.D's XJ or PL links or any other manufacturer's rivet connecting links. The KM500 may be used to cut any 520, 525, 50(530) or 532 chain that uses any one of D.I.D's RJ, FJ, XJ, ZJ, or PL connecting links.

D.I.D's new chain tool is exclusively designed only for D.I.D's ZJ type connecting links. D.I.D's ZJ type connecting links are strongly recommended when a particular type of connecting link is not designated as an original part of the motorcycle. For O-Ring chains, you are strongly recommended to use ZJ connecting links. Cutting and rivetting work with D.I.D Chain tool must be performed with complete adherence to the instruction manual supplied.

Suitable for 50(530), 520, 525 and 532 chain

Order No. 5914600

Suitable for 428 chain

Order No. 5914601

Spare pin for 5914600

Order No. 5914603

Spare pin for 5914601

Order No. 5914604

Spare U Holder 50 Series (5914600)

Order No. 5914605

Spare U Holder 40 Series 5914601

Order No. 5914606

Spare Plate Holder 50 Series 5914600

Order No. 5914607

Spare Plate Holder 40 Series 5914601

Order No. 5914608

ZJ LINK RIVETTING/CUTTING TOOL - FOR CONSUMER HOME WORKSHOP USE**POWERITE MODEL**

- Same design as above, but for DIY use in home workshop

Suitable for 50(530), 520, 525 and 532 chain

Order No. 5914609

Spare pin for 5914609

Order No. 5914610

WHALE BRAND

Chain Link Extractor for chain 420-630

Order No. 5914500

Spare pin for 5914500


Order No. 5914509

Riveter for chain 520/525/50

Order No. 5914502

Spare pin for 5914502

Order No. 5914516

**POWERITE**

Chain Link Extractor for chain 420-50

Order No. 5914525

Spare pin for 5914525

Order No. 5914526

CHAIN ROLLER GUIDE

Superior way to guide the final drive chain over swingarm into drive sprocket chamber.

Size	Colour	Order No.
30mm	Black	3300005
30mm	Blue	3300006
40mm	Black	3300010
40mm	Blue	3300011

